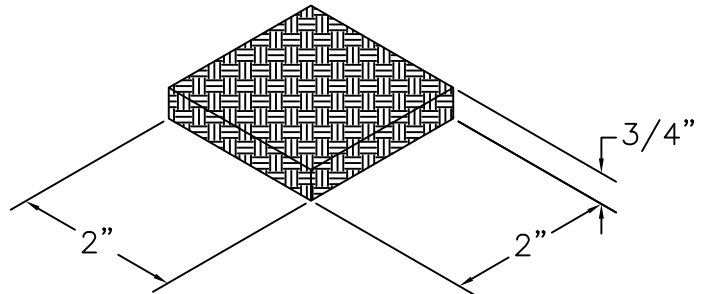
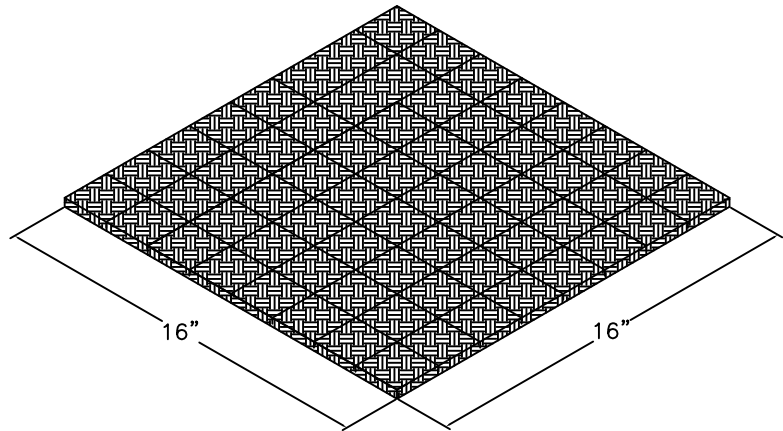


STANDARD CONSTRUCTION
MATERIAL:
 REBONDED RUBBER

 .75g/cm³ DENSITY (ASTM D297)
 116psi TENSILE STRENGTH (ASTM D412)
 SHORE A HARDNESS 50 (ASTM D2240)

FEATURES

 PROVIDES VIBRATION INSULATION BETWEEN
 CONDENSING UNIT AND MOUNTING SURFACE.

 VIBRATION PADS COME IN 16"x16" SHEETS (64 PIECES
 PER SHEET), PRESCORED FOR EASY SEPARATION.


JOB NAME:
LOCATION:
ARCHITECT:
ENGINEER:
CONTRACTOR:
<p>CONTACT MIAMI TECH INC. FOR ADDITIONAL INFORMATION OR WITH SPECIAL REQUIREMENTS.</p> <p>3611 NW 74TH ST MIAMI, FL 33147 PHONE: 305-693-7054 FAX: 305-693-6152</p> <p>WEB: WWW.MIAMITECH.COM EMAIL: SALES@MIAMITECH.COM</p>

VP
**VIBRATION PAD
 PRODUCT SPECIFICATIONS**

NOTE: ALL DRAWINGS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

DRAWN BY: AV	DATE: 9/25/2012	SCALE: NOT TO SCALE	DRAWING NO.:
CHECKED BY: IG	DATE: 6/9/2014	REVISION: 2	

VP