

**STANDARD CONSTRUCTION**

**MATERIAL:**  
26 GAUGE ASTM A-653 HOT-DIPPED GALVANIZED  
STEEL SHEET

**SIZE:**  
10" INLET DIAMETER  
3" DISCHARGE

**PITCHES AVAILABLE:**

A = 2.5" PER 12"  
B = 3.0" PER 12"  
C = 4.0" PER 12"  
D = 5.0" PER 12"  
F = 0" PER 12" (FLAT).

**FEATURES:**

GALVANIZED STEEL PROVIDES EXCELLENT  
CORROSION RESISTANCE AND LONGEVITY.



ACME LOCK SEAM CREATES A STRONG,  
RIGID BODY.

SEAMS SEALED WITH PARABOND ALUMINUM  
ADHESIVE.

ALL MODELS COME STANDARD WITH BIRDSCREEN.

**OPTIONS:**

FOR MODELS WITHOUT BIRDSCREEN, ADD "-NS" TO  
PART NUMBER

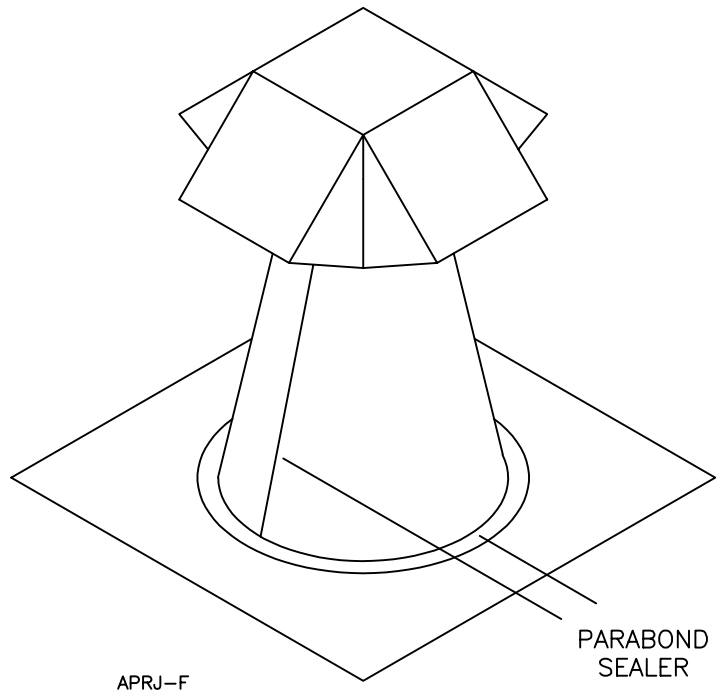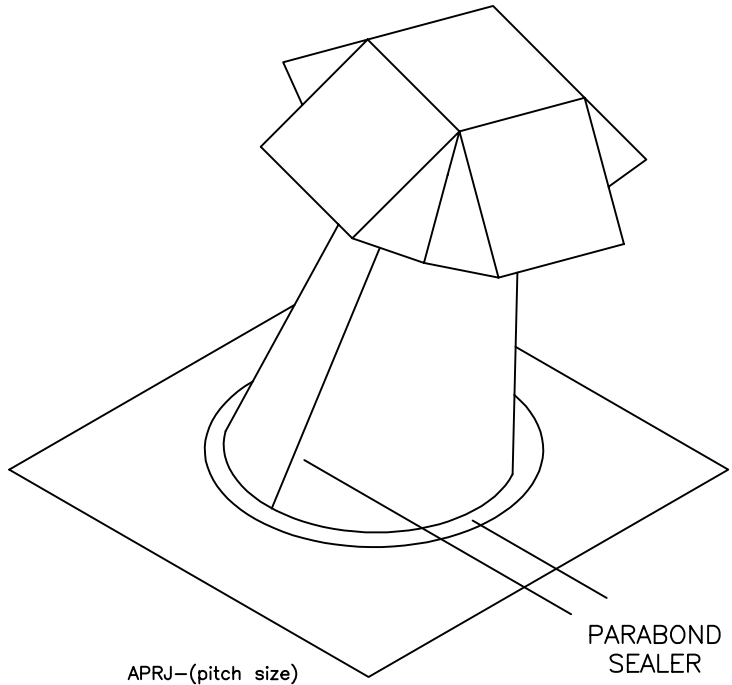

JOB NAME:
LOCATION:
ARCHITECT:
ENGINEER:
CONTRACTOR:
CONTACT MIAMI TECH INC. FOR ADDITIONAL INFORMATION OR WITH SPECIAL REQUIREMENTS.
3611 NW 74TH ST MIAMI, FL 33147 PHONE: 305-693-7054 FAX: 305-693-6152
WEB: WWW.MIAMITECH.COM EMAIL: SALES@MIAMITECH.COM

**APRJ**

ALL PURPOSE ROOF JACK  
PRODUCT SPECIFICATIONS

NOTE: ALL DRAWINGS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.