



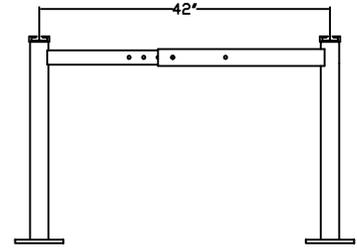

MODEL AST

SPREAD CENTER TO CENTER: 27" CLOSED - 42" OPENED
ENGINEERED SPECIFICALLY FOR NON-USE IN HIGH VELOCITY
HURRICANE ZONES (HVHZ - MIAMI-DADE & BROWARD COUNTY).
ENGINEER'S RAISED-SEAL DRAWINGS AVAILABLE.
FLORIDA PRODUCT APPROVAL #FL21464



Part No.	Post Pairs	Size
AST185Q	Aluminum C/U 18.5" Post Pairs	18.5"
AST240Q	Aluminum C/U 24" Post Pairs	24"
AST300Q	Aluminum C/U 30" Post Pairs	30"

Part No.	I-Beams	Size
ASTI-3	Aluminum Stand I-Beam, 3'	3'
ASTI-6	Aluminum Stand I-Beam, 6'	6'
ASTI-9	Aluminum Stand I-Beam, 9'	9'
ASTI-12	Aluminum Stand I-Beam, 12'	12'
ASTI-15	Aluminum Stand I-Beam, 15'	15'
ASTI-18	Aluminum Stand I-Beam, 18'	18'

Part No.	Cross Mounting Angle
ASTCAB-XX	Angle length is determined by the distance between center webbing of I-Beams.

MODEL AST
ALUMINUM CONDENSING UNIT STAND
FOR NON-HVHZ USE
PRODUCT INFORMATION SHEET

NOTE: ALL DRAWINGS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.



DRAWN BY: CG	DATE: 01/30/17	SCALE: NOT TO SCALE	DRAWING NO.
CHECKED BY: IV	DATE: -	REVISION: 4/9/19	AST